

STROCO


Exceeding Your Expectations

ORDERING INFORMATION

SHELL SIZE

SEE COLUMN UNDER EACH SERIES

SERIES	OPTIONS
S800	Blank- Use complete Nut Plate
S900	P- Primer per Mil-P-23377
S900T	
S900DM	B- Optional shell Size
S902	
S912	
S915	
S921	
S922	Z- Tiolube dry film lubricant
S933	
S935	.040- Material/.040" thickness
S938	
S994	
S995	
S996	

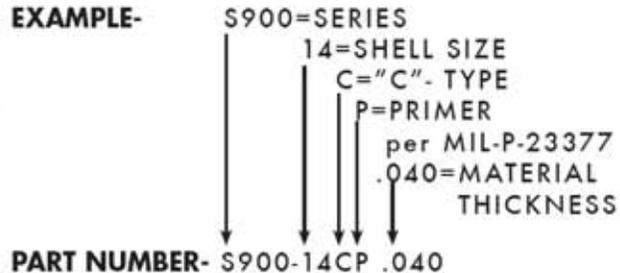

ADDITIONAL INFORMATION

NUT PLATE - TYPES



COMPLETE NUT PLATE

Stroco Nut Plates can be mounted either on the flange side of the connector or on side of panel opposite the connector flange.

"COMPLETE" or "STANDARD" Nut Plate

The complete nut plate is installed prior to the wire bundle being assembled with the connector.

"C- type" Nut Plate-

The C- type Nut Plate can be used either before or after the wire bundle has been assembled with the connector. It does not contain the fourth wall as the complete or standard nut plate does. The C- type Nut Plate can also be used in replacement or rework applications; installed over the wire bundle without having to remove the connector.



"C-TYPE" NUT PLATE



"CX-TYPE" SEGMENT

"CX- type" Nut Plate-

The CX- type Nut Plate can be used in the same applications as the C- type. The CX- type is designed to be used in applications with minimal space in hard to reach areas.

