



Exceeding Your Expectations

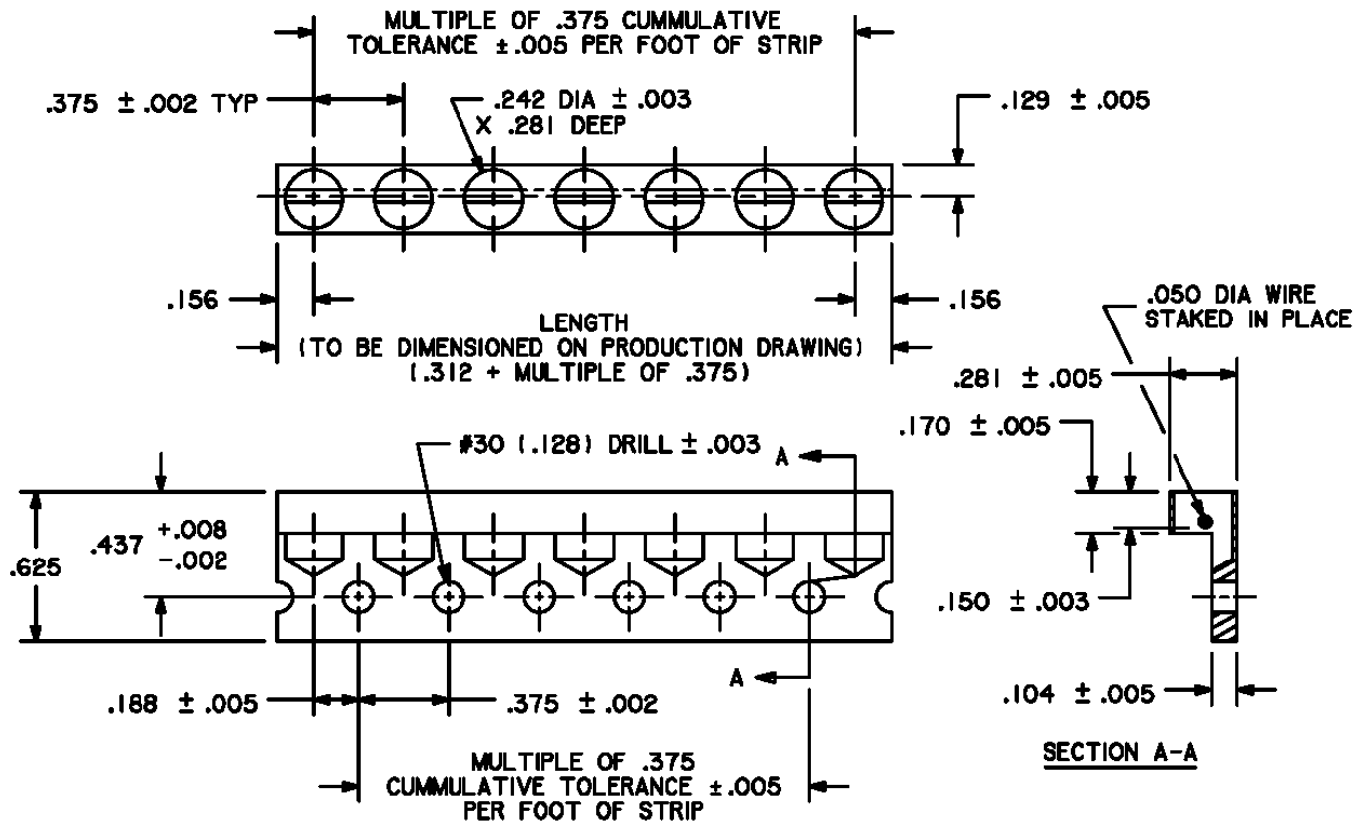


FIGURE 1

Material: Wire: 0.050 diameter 316 stainless steel wire, Condition B, spring temper  
 Receptacle: 6061-T6 Aluminum alloy in accordance with AMS-QQ-A-200/8.

Finish: Wire: None  
 Strip: Aluminum coat, ion vapor deposition, in accordance with MIL-DTL-83488 Type II, Class 3, except ends may be chemically surface treated in accordance with MIL-C-5541.

Quality Conformance Inspection: MIL-F-25173

DIMENSIONS IN INCHES: TOLERANCES UNLESS OTHERWISE SPECIFIED: X.XX ± 0.03; X.XXX ± 0.010; ANGLES ± 0.5°  
 DOCUMENT AND ITS CONTENTS ARE PROPRIETARY INFORMATION TO STROCO AND ITS AFFILIATES. USE WITHOUT AUTHORIZATION IS PROHIBITED.

CAGE NO. 19904	TITLE RECEPTACLE - TURNLOCK FASTENER, ANGLE MOUNTING STRIP	PART NUMBER S2800IVD-XXX <small>XXX= Number of receptacle holes</small>
		REV B 01/10/05