


# STROCO

Exceeding Your Expectations

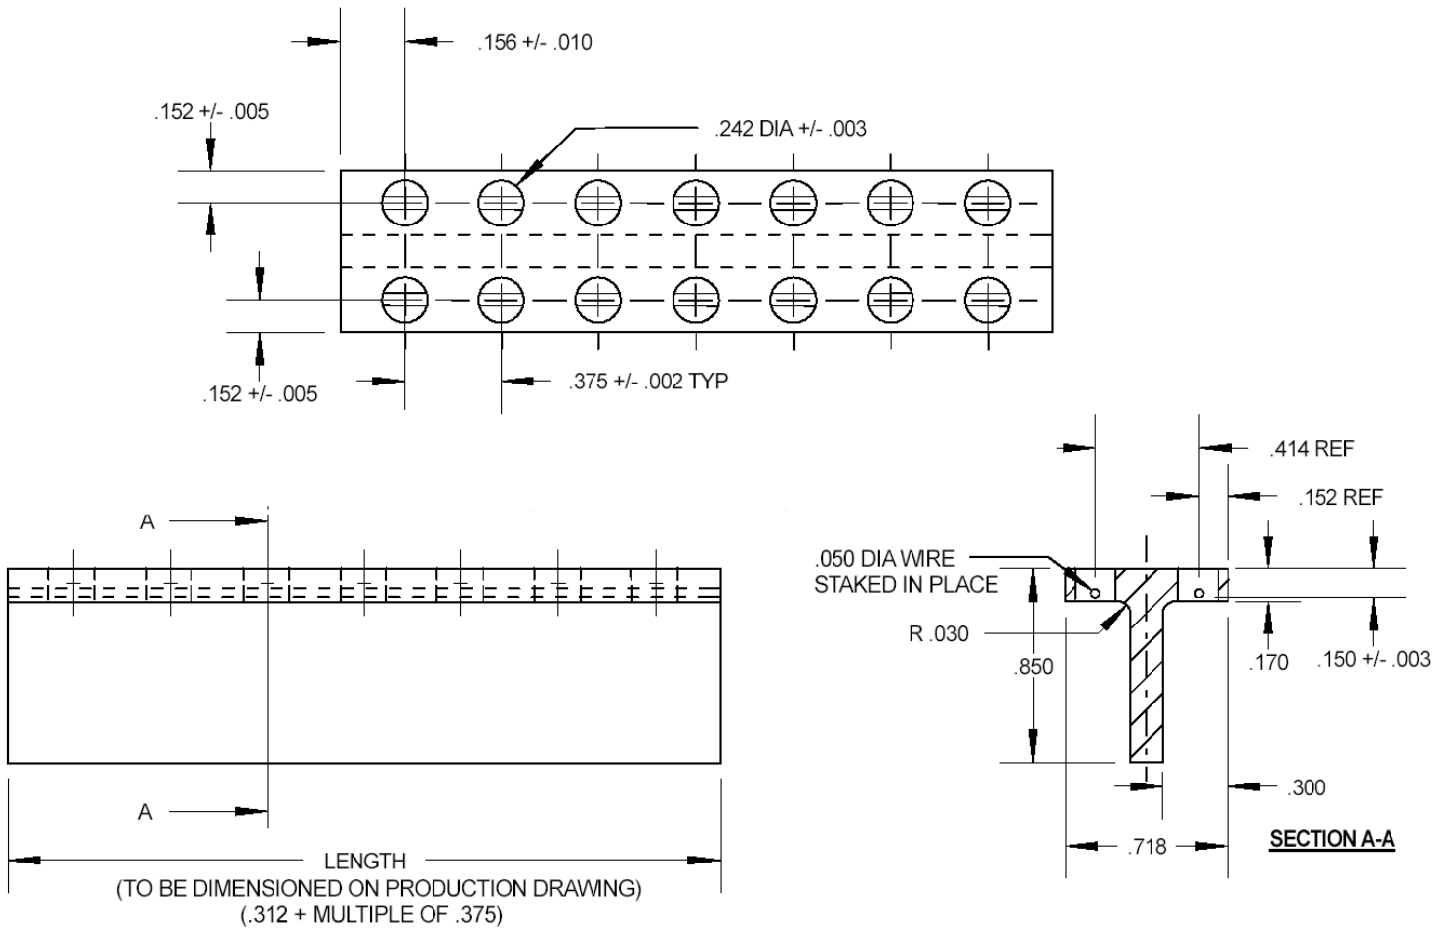

**MATERIAL**

Wire: 0.050 diameter 316 stainless steel wire, Condition B, spring temper per ASTM A 313/A 313/M  
 Receptacle: 6061-T6 Aluminum alloy in accordance with AMS-QQ-A-200/8

**FINISH**

Wire: None  
 Strip: Chemical surface treat per MIL-C-5541. Cut ends shall be surface treated per MIL-C-5541

Quality Conformance Inspection: MIL-F-25173

DIMENSIONS IN INCHES: TOLERANCES UNLESS OTHERWISE SPECIFIED: X.XX ± 0.03; X.XXX ± 0.010; ANGLES ± 0.5°  
 DOCUMENT AND ITS CONTENTS ARE PROPRIETARY INFORMATION TO STROCO AND ITS AFFILIATES. USE WITHOUT AUTHORIZATION IS PROHIBITED.

<p>CAGE NO. 19904</p>	<p>TITLE <b>RECEPTACLE – TURNLOCK FASTENER, ANGLE MOUNTING STRIP</b></p>	<p>PART NUMBER S2905A-XXX <small>XXX= Number of receptacle holes for each row of holes</small> REV B 04/09/2013</p>
---------------------------	--	---