


STROCO

Exceeding Your Expectations

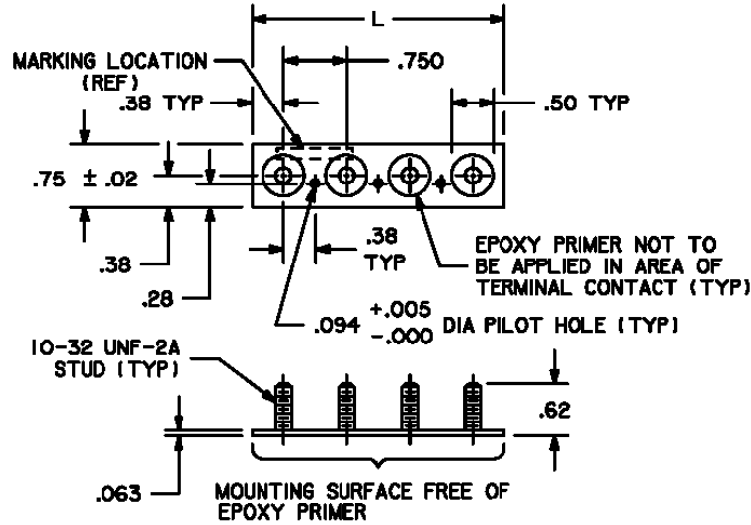

Pilot Holes Part Number	No. of Terminals	L
103A	3	2.25
104A	4	3.00
105A	5	3.75
106A	6	4.50
107A	7	5.25
108A	8	6.00
109A	9	6.75
110A	10	7.50

Material:

Studs: Carbon steel, tensile strength 50,000 P.S.I., minimum
Board: Aluminum alloy 6061-T6 per AMS-QQ-A-250/11.

Finish:

Studs: Cadmium plated per AMS-QQ-P-416, Type II, Class 2
Board: Chemically conversion treat with iridite 14-2 per [P.S. 13222](#). Finish with two coats of [MMS 423](#) epoxy primer per [P.S. 13375](#) except as shown in Figures 1 through 5. In addition, epoxy primer shall not be applied to the mounting side of the flange or to the mounting surface of the terminal boards.

DIMENSIONS IN INCHES: TOLERANCES UNLESS OTHERWISE SPECIFIED: X.XX ± 0.03; X.XXX ± 0.010; ANGLES ± 0.5°
DOCUMENT AND ITS CONTENTS ARE PROPRIETARY INFORMATION TO STROCO AND ITS AFFILIATES. USE WITHOUT AUTHORIZATION IS PROHIBITED.

CAGE NO. 19904	TITLE	PART NUMBER 10XA
	TERMINAL BOARD	
DRAWING FOR INTERNAL USE ONLY.		
REV A 04/01/06		

